


球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

JIS-10K KGMC-16K

FIG F69D

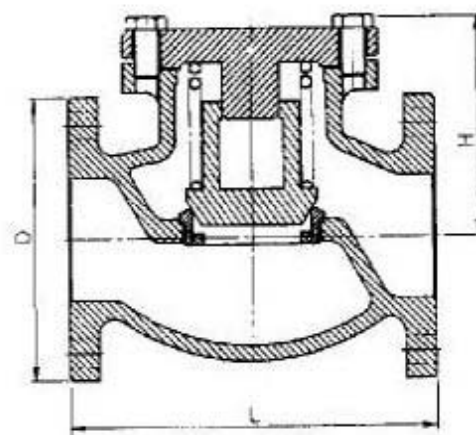

零件及材質表 Parts and materials list

零件 Part	材質 Material
閥體 Body	FCD 45
閥蓋 Bonnet	FCD 45
閥門 Disc	SUS 410
墊片 Gasket	Graphite
閥體座環 Body seat ring	SUS 410
彈簧 Spring	SUS 304
閥蓋襯套 Bonnet ring	SUS 410

標稱壓力 Working pressure marking	16 kgf/cm ²
120°C以下之靜流水 Non-shock water under 120°C	14 kgf/cm ²
220°C以下之蒸汽、氣體、油、脈動水 Steam, Air, Oil, Pulse stream under 220°C	10 kgf/cm ²
試驗壓力(水壓) Hydrostatic test pressure	
閥體 Shell	20 kgf/cm ²
閥座 Seat	15 kgf/cm ²

詳細尺寸 Dimension

單位 Unit : 公釐 mm


規格	2½	3	4	5	6
Size	65	80	100	125	150
L	216	241	292	356	406
H	125	135	170	260	280
D	175	185	210	250	280

球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

JIS-10K

FIG F39D(SUS Disc) FIG F39D-G(Teflon Disc)

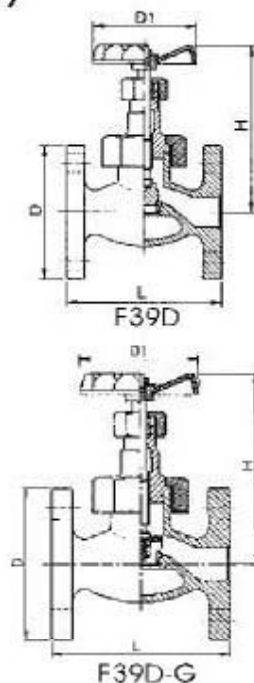

零件及材質表 Parts and materials list

零件 Part	材質 Material
閥體 Body	FCD 45
閥蓋 Bonnet	FCD 45
閥門 Disc	SUS 410
閥桿 Stem	SUS 410
迫緊螺帽 Packing nut	FCD 45
閥體座環 Body seat ring	SUS 410
連結螺帽 Connecting nut	FCD 45
墊片 Gasket	Graphite
迫緊 Packing	Graphite
座環 Disc ring	PTFE+15%G.F.T
手輪 Handwheel	FCD 45

詳細尺寸 Dimension

單位Unit : 公釐mm

規格	1/2	3/4	1	1 1/4	1 1/2	2
Size	15	20	25	32	40	50
L	108	117	127	140	165	203
H	121.5	126	143.5	161	179	194
D	95	100	125	135	140	155
D1	80	80	100	120	120	140

標稱壓力 Working pressure marking 10 kgf/cm²

120°C以下之靜流水 Non-shock water under 120°C 14 kgf/cm²

220°C以下之蒸汽、氣體、油、脈動水

Steam, Air, Oil, Pulse stream under 220°C 10 kgf/cm²

試驗壓力(水壓) Hydrostatic test pressure

閥體 Shell 20 kgf/cm²

閥座 Seat 15 kgf/cm²


* PTFE墊片閥最高使用溫度180°C (360°F)

球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

JIS-10K

FIG F69D(SUS Disc) FIG F69D-G(Viton Disc)

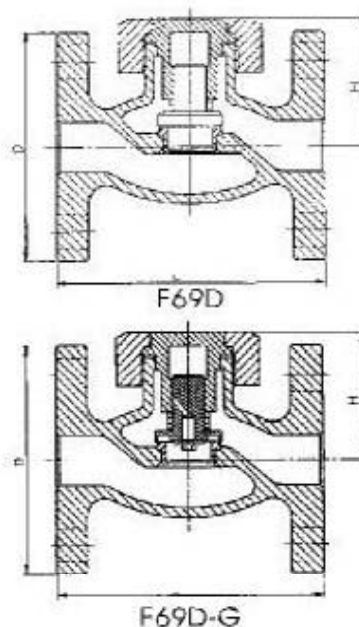

零件及材質表 Parts and materials list

零件 Part	材質 Material
閥體 Body	FCD 45
閥蓋 Bonnet	FCD 45
閥門 Disc	SUS 410
閥體座環 Body seat ring	SUS 410
連結螺帽 Connecting nut	FCD 45
墊片 Gasket	Graphite
座環 Disc ring	Viton
彈簧 Spring	SUS 304
閥蓋襯套 Bonnet ring	SUS 410

標稱壓力 Working pressure marking	10 kgf/cm ²
120°C以下之靜流水 Non-shock water under 120°C	14 kgf/cm ²
220°C以下之蒸汽、氣體、油、脈動水 Steam, Air, Oil, Pulse stream under 220°C	10 kgf/cm ²
試驗壓力(水壓) Hydrostatic test pressure	
閥體 Shell	20 kgf/cm ²
閥座 Seat	15 kgf/cm ²

詳細尺寸 Dimension

單位 Unit : 公釐 mm

規格 Size	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50
L	108	117	127	140	165	203
H	46.8	50.2	60.8	69.7	78.5	90.1
D	95	100	125	135	140	155


* VITON墊片閥最高使用溫度204°C (400°F)

球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

JIS-10K KGMC-16K

FIG F39D

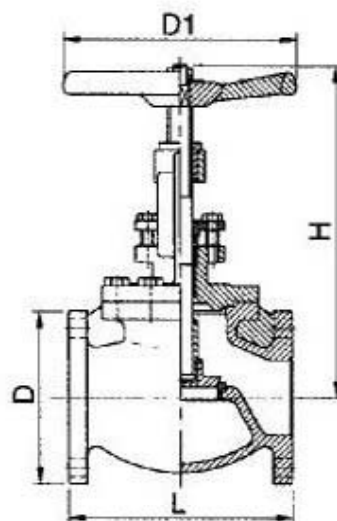

零件及材質表 Parts and materials list

零件 Part	材質 Material
閥體 Body	FCD 45
閥蓋 Bonnet	FCD 45
閥門 Disc	SUS 410
閥桿 Stem	SUS 410
閥體座環 Body seat ring	SUS 410
格南 Gland	FCD 45
墊片 Gasket	Graphite
迫緊 Packing	Graphite
手輪 Handwheel	FCD 45

標稱壓力 Working pressure marking 16 kgf/cm²
 120°C以下之靜流水 Non-shock water under 120°C 14 kgf/cm²
 220°C以下之蒸汽、氣體、油、脈動水
 Steam, Air, Oil, Pulse stream under 220°C 10 kgf/cm²
 試驗壓力(水壓) Hydrostatic test pressure
 閥體 Shell 20 kgf/cm²
 閥座 Seat 15 kgf/cm²

詳細尺寸 Dimension

單位 Unit : 公釐 mm

規格	2½	3	4	5	6
Size	65	80	100	125	150
L	216	241	292	356	406
H	325	355	390	435	505
D	175	185	210	250	280
D1	224	250	300	315	355