



FX Series Steam Trap



Ductile iron F & T Steam Traps



鑄鐵浮球式輸水閥

- ▶ 啟動時可排大量不凝結氣體
 - ▶ 適合前端有控溫設備使用
 - ▶ 連續排放，噪音小
 - ▶ 內有水封阻擋蒸氣，節能效果佳
 - ▶ 內部交換器內部真空時，亦可由重力排水
-
- ▶ Stainless steel, not rust, suitable for corrosive environment and the health requirements of high places.
 - ▶ Can charge non-condensing gas when starting.
 - ▶ Suitable for front-end with temperature control devices.
 - ▶ Continuous emissions, less noise.
 - ▶ Within the water seal to block steam, energy-saving effect of good.
 - ▶ Heat exchanger inside a vacuum, also can discharge by the gravity.


材質表

CONSTRUCTION OF MATERIALS

CAP & BODY	本體	FCD450	球鐵
FLOAT	浮球	STAINLESS STEEL304	不銹鋼
MECHANISM	機械結構	STAINLESS STEEL304	不銹鋼
SEAT & VALVE	閥座	HARDENED 440	硬鉻鋼
AIR VENT CAGE	排氣籠殼	STAINLESS STEEL304	不銹鋼
DIAPHRAGM OF AIR VENT	排氣閥膜片	STAINLESS STEEL304	不銹鋼
GASKET	墊片	Graphite	石墨
BOLTS	螺絲	CARBON STEEL	碳鋼
NUTS	螺帽	CARBON STEEL	碳鋼


連續排水量表，公斤/小時

CONTINUOUS DISCHARGE CAPACITY OF CONDENSATE IN KG/HR

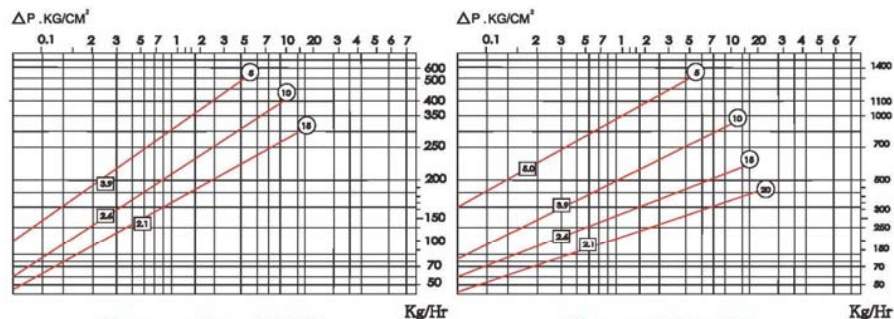

Conn ection:15-20

Conn ection:25

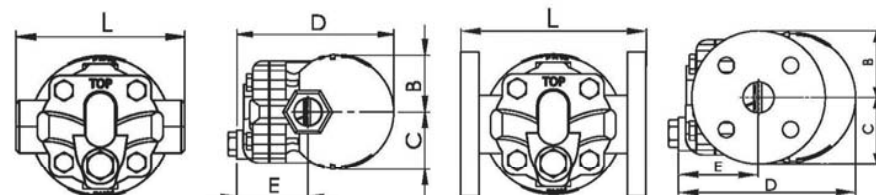

NO.FTX22

NO.FTX22F

NO.FTX22 DIMENSIONS (MM). MOP (KG/CM) WT(KG)

NO.	CONN.SE.*	L	B	C	D	E	MOP	WT
FTX22	15.20	121	50	50	147	67	15	4.0
FTX22	25	145	61	61	166	75	20	4.3

*NPT.BSPT.AVAILABLE

NO.FTX22F

NO.	CONN.SE.*	L	B	C	D	E	MOP	WT
FTX22F	15.20	150	50	50	147	67	15	5.4
FTX22F	25	160	61	61	166	75	20	6.3

*FLANGE SPEC CONSUAT FACTORY.

