



特點



- ▶ 1. 閥體是由鋼管焊接而成, 幾乎無外漏
- ▶ 2. 球墊可因工況調整
- ▶ 3. 閥杆採用防爆設計
- ▶ 4. 溫度範圍: -60~200°C
- ▶ 5. 驅動方式: 手動 / 齒輪

FEATURES


- ▶ 1. Welded Body Low Leakage
- ▶ 2. Seat adjustment by Envirment
- ▶ 3. Anti Proof Stem
- ▶ 4. Temperature Range: -60~200°C
- ▶ 5. Operation: Handle / Gear Box

全焊接球閥

EXPLOSION DRAWING 爆炸圖

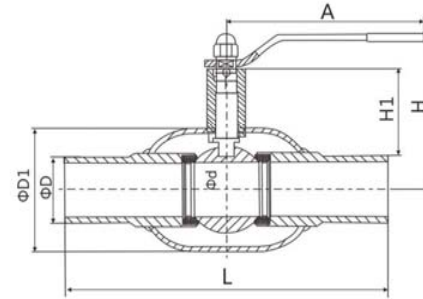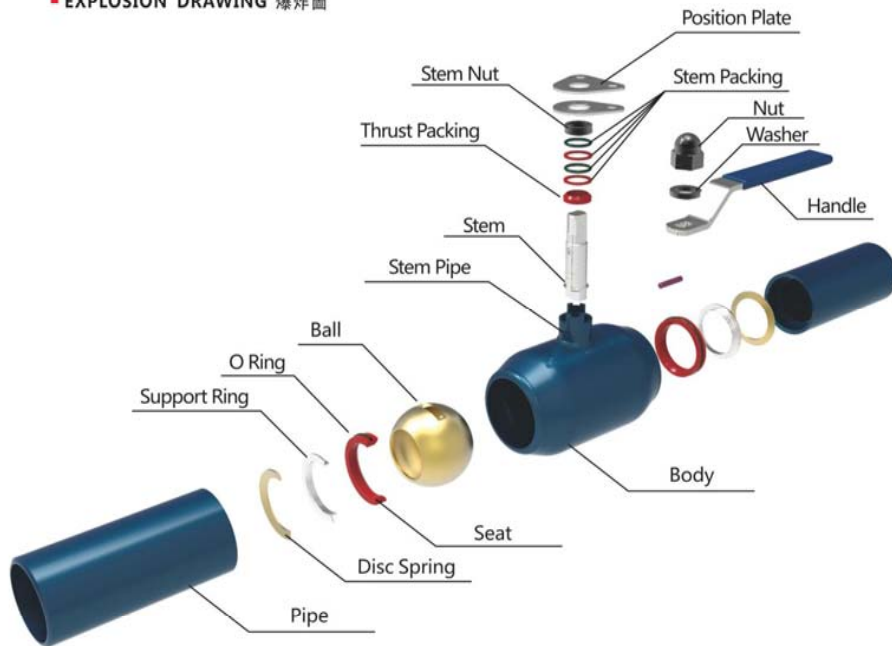

壓力溫度變化表

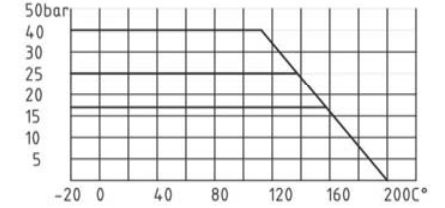

MATERIAL LIST 材質表

ITEM	部件	PART	MATERIALS	ITEM	部件	PART	MATERIALS
1	手柄	Handle	A105	7	止推墊	Thrust Packing	Graphite
2	填料壓蓋	Packing Nut	304	8	閥杆	Stem	420
3	墊圈	Stem Packing	Graphite	9	支撐環	Support Ring	60Si2Mn
4	O型圈	O Ring	FKM	10	球	Ball	304
5	支管	Pipe	A105	11	體管	Body	A105
6	軸承	Stem Pipe	A105	12	閥座	Seat	PTFE+C

DIMENSION 尺寸表

口徑 (Size)	壓力 (PN)	L	A	H	H1	d	D1	D(GB)	D(DIN)
DN15	40	230	120	97	45	15	42.4	22	21.3
DN20	40	230	150	103	46	20	48.3	25	26.9
DN25	40	230	150	109	48	25	60.3	32	33.7
DN32	40	260	190	119	63	32	76.1	38	42.4
DN40	40	300	190	125	67	38	88.9	45	48.3
DN50	25	300	275	183	82	50	114.3	57	60.3
DN65	25	300	275	196	87	65	139.7	73	76.1
DN80	25	325	275	219	104	80	168.3	89	88.9
DN100	25	325	415	242	104	100	177.8	108	114.3
DN125	25	350	540	248	118	125	219.1	133	139.7
DN150	25	400	745	275	130	150	273	159	168.3
DN200	25	530	gearbox	-	-	200	355.6	219	219.1
DN250	25	640	gearbox	-	-	250	426	273	273