

Thermodynamic Steam Trap



圓盤式熱動力疏水閥

- ▶ 內部零件皆可更換,如疏水閥異常,不需從管道上移除
- ▶ 體積小,重量輕,排量,抗結凍
- ▶ 套焊與絲口連接皆可
- ▶ 鑄鋼閥體可使用在高溫高壓環境
- ▶ All Inner Parts Can be Replaced, No need to Remove Traps from Pipeline if Trap Failure
- ▶ Small size, light weight, large displacement, anti-gelatinized.
- ▶ Screwed & Socket Weld Connection Available
- ▶ Cast Steel Body Service In High Temperature & Pressure


材質表

CONSTRUCTION OF MATERIALS

| No. | 部件 | Parts | Note |
|-----|----|------------|--------------|
| 1 | 閥體 | body | A216-WCB |
| 2 | 閥座 | Valve Seat | S.S 420 |
| 3 | 上蓋 | Top Cover | A216-WCB |
| 4 | 圓盤 | Disc | S.S 420 |
| 5 | 墊片 | Gasket | Graphite+S.S |
| 6 | 濾網 | Screen | A182-304 |
| 7 | 螺絲 | Bolt | A193-B7 |

- ▶ MOP/最高操作壓力、溫度: 41KG/CM² x 425C
- ▶ 連續排水量, 公斤/小時



CONTINUOUS DISCHARGE CAPACITY OF CONDENSATE IN KG/HR

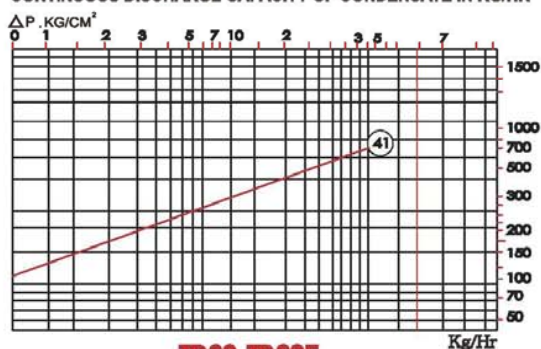

TD60 TD60F

選擇時需考慮2至3倍的安全系數

- ▶ 相關其他產品
- 1. 高低壓空氣排水器
- 2. 水用蒸氣排氣閥
- 3. 汽水分離器
- 4. 冷凝水泵
- ▶ Other products
- 1. Air trap
- 2. Air Vent
- 3. Air & Water Separator
- 4. Cooling water pump

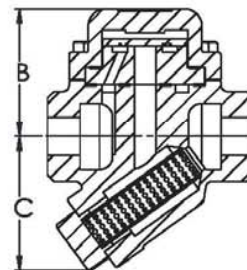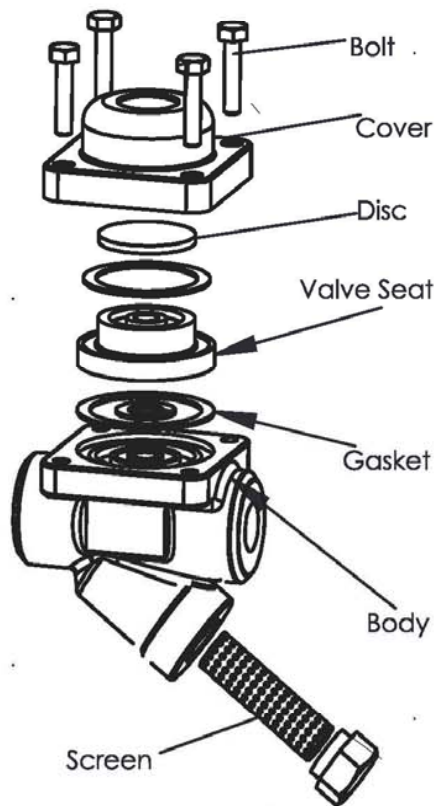


TD60 Screwed Thermodynamic Steam Trap Dimension

| Model | Size(DN) | L | B | C | D | MOP | Weight |
|-------|----------|----|----|----|----|-----|--------|
| TD60 | 15.20 | 95 | 59 | 62 | 70 | 41 | 1.3 |
| | 25 | 95 | 59 | 62 | 70 | 41 | 1.4 |

TD60F Flanged Thermodynamic Steam Trap Dimension

| Model | Size(DN) | L | B | C | D | MOP | Weight |
|-------|----------|-----|----|----|----|-----|--------|
| TD60F | 15 | 150 | 59 | 62 | 70 | 41 | 4 |
| | 20 | 150 | 59 | 62 | 70 | 41 | 5.3 |
| | 25 | 160 | 59 | 62 | 70 | 41 | 6.5 |

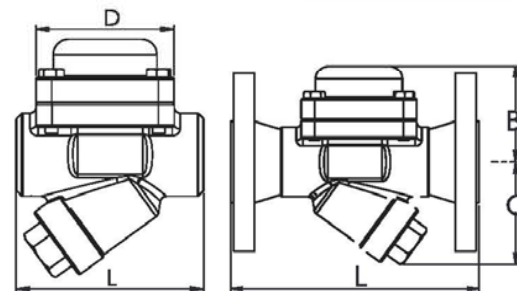

Trap No. TD60

Trap No. TD60F

