



特點



- ▶ 1.閥體是由鋼管焊接而成,幾乎無外漏
- ▶ 2.球墊可因工況調整
- ▶ 3.閥杆採用防爆設計
- ▶ 4.溫度範圍: -60~200℃
- ▶ 5.驅動方式: 手動或渦輪傳動

FEATURES


- ▶ 1.Welded Body Low Leakage
- ▶ 2.Seat adjustment by Envriment
- ▶ 3.Anti Proof Stem
- ▶ 4.Temperature Range: -60~200℃
- ▶ 5.Operation: Handle & Wheel or Actuator

大口徑全焊接球閥

EXPLOSION DRAWING 爆炸圖

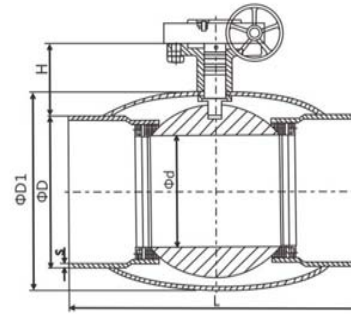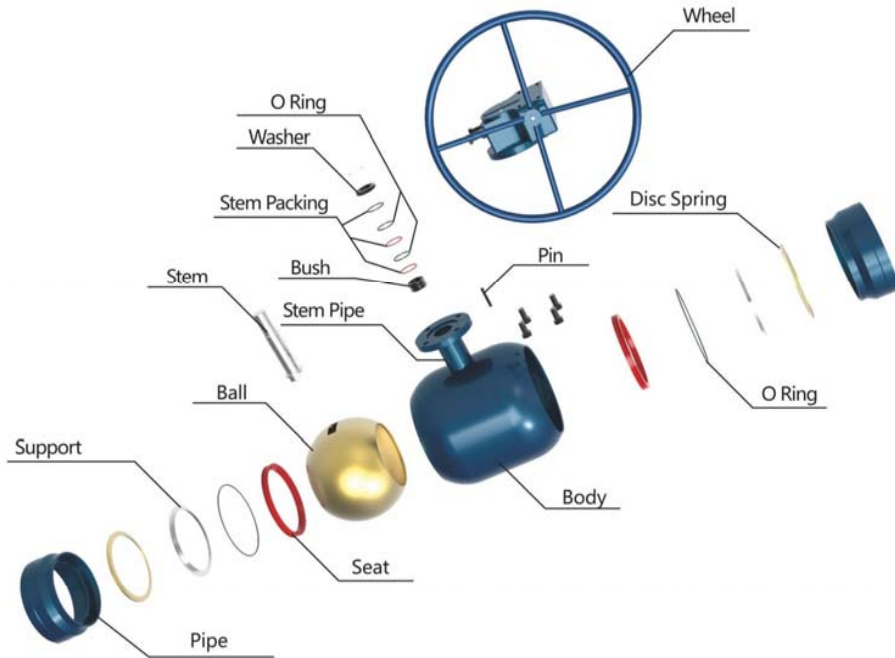

壓力溫度變化表

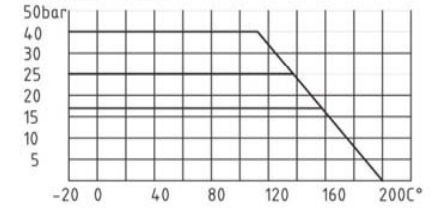

MATERIAL LIST 材質表

| ITEM | 部件 | PART | MATERIALS | ITEM | 部件 | PART | MATERIALS |
|------|------|--------------|-----------|------|-------|----------------|-----------|
| 1 | 螺母 | Nut | A193 B7 | 10 | 平鍵 | Pin | ANSI 1045 |
| 2 | 螺栓 | Bolt | A193 B7 | 11 | 填料 | Thrust Packing | PTFE |
| 3 | 卡簧 | Circlip | 65Mn | 13 | 閥杆 | Stem | 420 |
| 4 | 墊圈 | Stem Packing | RPTFE | 14 | 螺簧 | Spring | 17-7PH |
| 5 | O型圈 | O Ring | VITON | 15 | 閥座 | Seat | PTFE+C |
| 6 | 上壓蓋 | GLAND | A105 | 16 | 閥座支撐圈 | Support Ring | A105 |
| 7 | 軸承 | Stem Pipe | A105 | 17 | 球 | Ball | 304 |
| 8 | 排污塞 | Plug | 420 | 18 | 閥體 | Body | A105 |
| 9 | 無油軸承 | Bush | 304+PTFE | 19 | 支管 | Pipe | A105 |

DIMENSION 尺寸表

| 口徑 (Size) | 壓力 (PN) | L | H | d | D1 | D(GB) | D(DIN) | S | 重量(kg) |
|-----------|---------|------|-----|------|-------|-------|--------|----|--------|
| DN125 | 25 | 325 | 91 | 100 | 177.8 | 133 | 139.7 | 5 | 20.7 |
| DN150 | 25 | 350 | 112 | 125 | 219.1 | 159 | 168.3 | 6 | 32.5 |
| DN200 | 25 | 400 | 95 | 150 | 273 | 219 | 219.1 | 7 | 43.9 |
| DN250 | 25 | 530 | 126 | 200 | 355.6 | 273 | 273 | 8 | 91.8 |
| DN300 | 25 | 640 | 149 | 250 | 426 | 325 | 323.9 | 9 | 130.9 |
| DN350 | 25 | 686 | 167 | 290 | 508 | 377 | 355.6 | 10 | 230.2 |
| DN400 | 25 | 762 | 184 | 350 | 558.8 | 426 | 406.4 | 12 | 388.2 |
| DN500 | 25 | 991 | 221 | 400 | 680 | 529 | 508 | 18 | 706 |
| DN600 | 16 | 1065 | 252 | 500 | 830 | 630 | 609.6 | 20 | 1033 |
| DN700 | 16 | 1346 | 298 | 600 | 1000 | 720 | 711 | 22 | 1648 |
| DN800 | 16 | 1524 | 354 | 700 | 1150 | 820 | 813 | 24 | 2705 |
| DN900 | 16 | 1727 | 400 | 781 | 1252 | 920 | 914.4 | 26 | 4057 |
| DN1000 | 16 | 1900 | 452 | 874 | 1456 | 1020 | 1016.0 | 28 | 6085 |
| DN1100 | 16 | 2000 | 514 | 976 | 1664 | 1120 | 1117.6 | 30 | 9172 |
| DN1200 | 16 | 2100 | 568 | 1020 | 1764 | 1220 | 1219.2 | 32 | 12758 |